

AGROS Rotary Tiller




Large Size (high position) Size AR5000HDSeries

- Deluxe large rotary tillers with high-clearance PTO, suitable for both paddy and dry field operations, designed for tractors with 90–140 horsepower
- With the application of floating functionality, it provides excellent shock absorption and smooth soil crushing performance. Low-resistance blade arrangement optimized to enhance soil flowability




AR5240HD

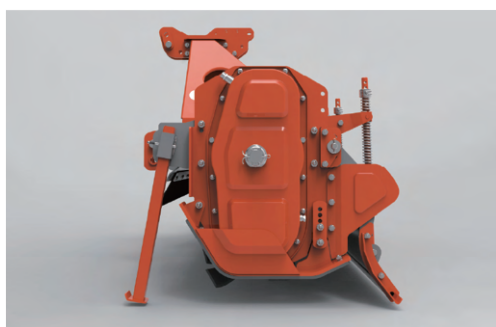

Specifications


Model	AR5230HD	AR5240HD	AR5250HD	AR5260HD
Overall Width (mm)	2585	2650	2780	2880
Overall Height (mm)	1250			
Overall Length (mm)	1000			
Working Width (mm)	2290	2350	2480	2580
Working Depth (mm)	120~150			
Number of Flanges (EA)	9	9	10	10
Number of Blades (EA)	54	54	60	60
Tillage Blade Type	C Type			
Blade Shaft Speed (rpm)	156, 175, 196, 219 / 540 rpm			
Required Power (hp)	90~100	100~120	110~120	120~140
Height of PTO Shaft (mm)	785			
Weight (kg)	870	880	915	930

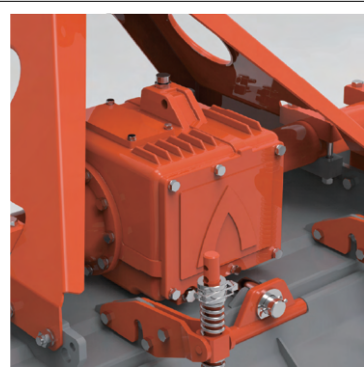

- Up to 150 HP multi-speed gearbox (Oil gauge installed as standard)
- High position PTO




- Floating type lower link connection plate absorbs shock loads and increases aircraft stability

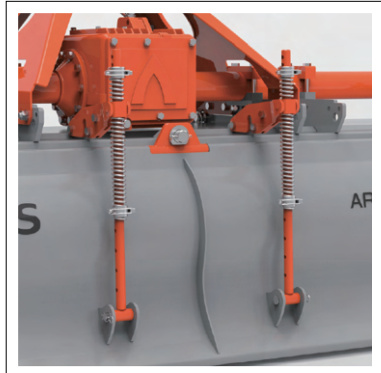


- Spring tension type back cover control bar (Sturdy ring pin fixation type)
- Back cover adjustable attachment position can be changed




- Powerful special Geared side drive of material
- Perfect gear fixation using special grooved nuts

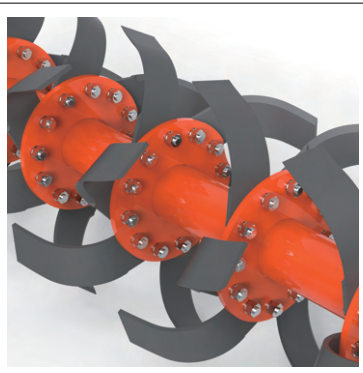

- Blade arrangement that increases soil fluidity

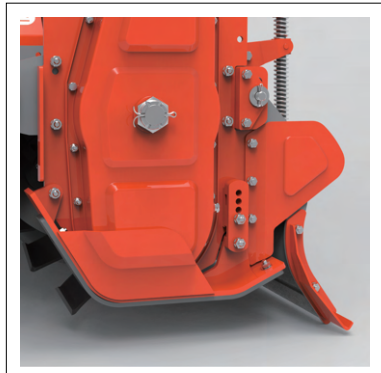

- Economical and convenient replacement type Auxiliary skid
- Use of highly durable spring steel
- Standard installation of side earth blocking plates

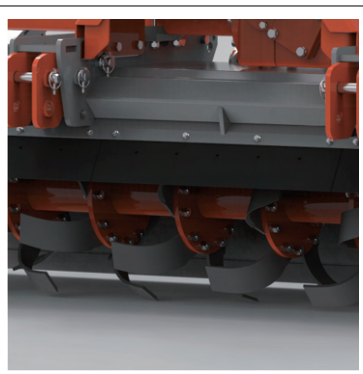

- Special Front mud splatter prevention rubber plate with good material flexibility
- Detachable type for easy attachment and detachment



- Versatile with sturdy structure and various mounting holes top master

AGROS

52, Seobyeon 1-gil, Miyang-myeon, Anseong-si
Gyeonggi-do, Republic of Korea

Tel: +82-31-677-7311, Fax: +82-31-677-5421

E-mail : agros@agros.co.kr

www.agros.co.kr